



## T20

20 Ah | 25.6 V | 512 Wh

### Electrical Specifications

Nominal Voltage	25.6 V
Nominal Capacity	20 Ah
Capacity	@ 25 A 48 min
Energy	512 Wh
Resistance	≤ 50 mΩ @ 50% SOC
Self Discharge	< 3% / month
Cell Type	LiFePO <sub>4</sub>

### Mechanical Specifications

Measurements (L × W × H)	196 × 166 × 175 mm
Approx. Weight	7.0 kg
Terminal Type	M6
Terminal Torque	9 to 11 N m
Case Material	ABS
Enclosure Protection	IP65

### Discharge Specifications

Max. Continuous Discharge Current	20 A
Peak Discharge Current	40 A (≈ 2 s)
BMS Discharge Cut-Off Current	50 A (50 ms)
Recommended Low Voltage Disconnect	22 V
BMS Discharge Cut-Off Voltage	20.8 V
Reconnect Voltage	21.6 V
Short Circuit Protection	200 to 600 μs

### Temperature Specifications

Discharge Temperature	-20 to 60 °C
Charge Temperature	0 to 45 °C
Storage Temperature	-5 to 35 °C
BMS High Temperature Cut-Off	65 °C
Reconnect Temperature	48 °C


### Charge Specifications

Recommended Charge Current	5 A
Maximum Charge Current	20 A
Recommended Charge Voltage	29.2 V
BMS Charge Cut-Off Voltage	< 30.8 V (0.5 to 1.5 s)
Reconnect Voltage	> 29.2 V
Balancing Voltage	< 28.8 V
Maximum Batteries in Series	4


### Compliance

Certifications	CE (Battery) UN38.3 (Battery) RoHS
Shipping Classification	UN 3480, CLASS 9


### Measurements

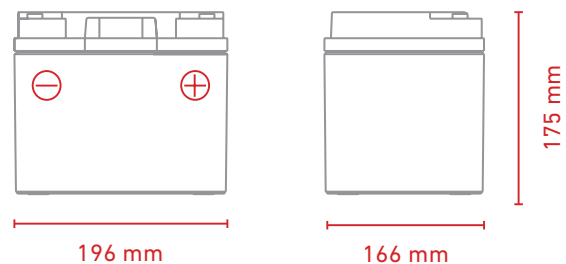


**Cycle Life vs. Depth of Discharge (DOD)**  
Discharge 0.5C / Charge 0.5C (25°C)

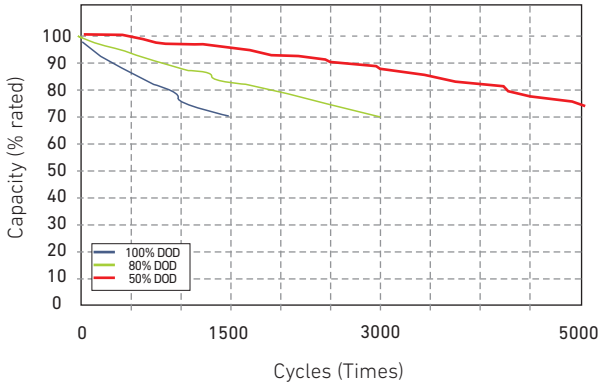

**Discharge Voltage Profiles at 0.5C Discharge Rate**  
(Various Ambient Temperatures)

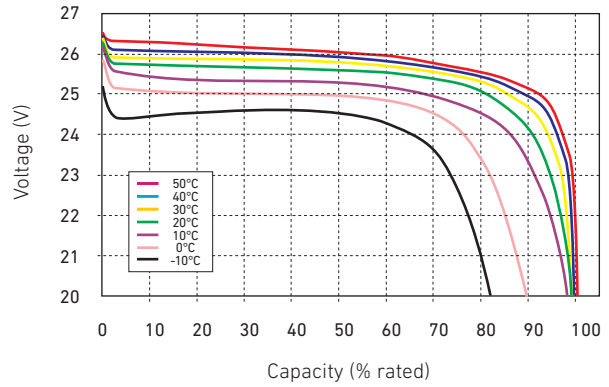

**Discharge Voltage Profiles at Various Rates**  
(25°C Ambient Temperature)

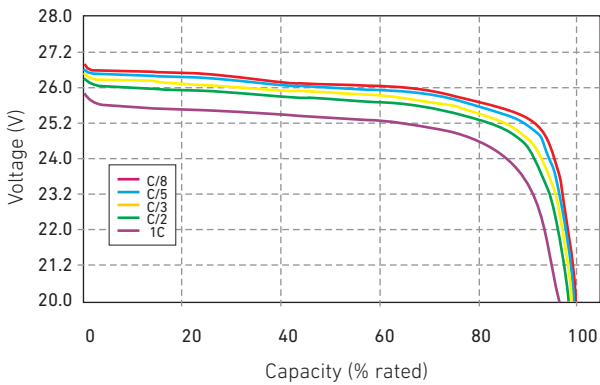

**Charging Characteristics (0.5C at 20°C)**

